


GENERATING SET GE 3200 H FAMILY

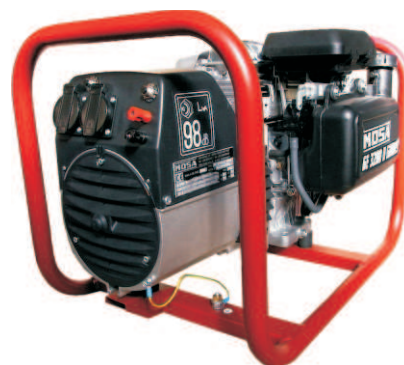

- Honda OHC petrol engine
- Engine shut down for low oil level
- Single-Phase synchronous alternator
- Output sockets: 2 x 230V 16A 2P+T SCHUKO
- Overload thermal shut off
- Battery charger with fuse protection
- Protective frame
- Portable
- Meets EC directives

| | | | | | | | | | | |
|--------------------|------------------------|-------------|------------------|------------------------|--|--|--|--|--|--|
| Standard Equipment | | | | | | | | | | |
| | Petrol engine | Air cooling | Manual recoil | Engine shut down (oil) | | | | | | |
| | | | | | | | | | | |
| | Synchronous alternator | Sockets | Thermal shut off | Battery charger | | | | | | |

Options on request

● 230V Plug

● Earthing kit

Technical data

GE 3200 H FAMILY

A.C. GENERATION - 50 Hz

Single-phase synchronous alternator, self-excited, self-regulated, brushless

| | |
|-------------------------------|------------------------|
| * Stand-by single-phase power | 2.8 kVA / 230V / 12.2A |
| * P.R.P. single-phase power | 2.4 kVA / 230V / 10.4A |
| Cosφ | 1 |
| Battery charger | 12Vd.c - 10A |
| Insulation class | H |

* Output powers according to ISO 8528-1

ENGINE

4-stroke petrol, air cooled, OHC

| | |
|----------------------------------|------------------------|
| Model | Honda GC 190 |
| * Stand-By net power | 3.5 kW (4.8 HP) |
| * P.R.P. net power | 2.7 kW (3.7 HP) |
| Cylinders/ Displacement | 1/ 187 cm ³ |
| Speed | 3000 rpm |
| Fuel consumption (75% of P.R.P.) | 1.05 l/h |

* Powers according to SAE J1349

GENERAL SPECIFICATIONS

| | |
|------------------------------------|--------------------------|
| Tank capacity | 1.8 l |
| Running time (75% of P.R.P.) | 1.7 h |
| IP protection degree | IP 23 |
| Dimensions LxWxh (mm) | 555x370x390 mm |
| Dry weight | 35 kg |
| *Acoustic power LwA (pressure LpA) | 98 dB(A) (73 dB(A) @ 7m) |

* For indoor use / For fixed installation only, in compliance with Directive 2000/14/CE